

Outage Data Initiative Test Script

3002017954



Outage Data Initiative Test Script

3002017954

Technical Update, February 2020

EPRI Project Manager

G. Gray

DISCLAIMER OF WARRANTIES AND LIMITATION OF LIABILITIES

THIS DOCUMENT WAS PREPARED BY THE ORGANIZATION(S) NAMED BELOW AS AN ACCOUNT OF WORK SPONSORED OR COSPONSORED BY THE ELECTRIC POWER RESEARCH INSTITUTE, INC. (EPRI). NEITHER EPRI, ANY MEMBER OF EPRI, ANY COSPONSOR, THE ORGANIZATION(S) BELOW, NOR ANY PERSON ACTING ON BEHALF OF ANY OF THEM:

(A) MAKES ANY WARRANTY OR REPRESENTATION WHATSOEVER, EXPRESS OR IMPLIED, (I) WITH RESPECT TO THE USE OF ANY INFORMATION, APPARATUS, METHOD, PROCESS, OR SIMILAR ITEM DISCLOSED IN THIS DOCUMENT, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, OR (II) THAT SUCH USE DOES NOT INFRINGE ON OR INTERFERE WITH PRIVATELY OWNED RIGHTS, INCLUDING ANY PARTY'S INTELLECTUAL PROPERTY, OR (III) THAT THIS DOCUMENT IS SUITABLE TO ANY PARTICULAR USER'S CIRCUMSTANCE; OR

(B) ASSUMES RESPONSIBILITY FOR ANY DAMAGES OR OTHER LIABILITY WHATSOEVER (INCLUDING ANY CONSEQUENTIAL DAMAGES, EVEN IF EPRI OR ANY EPRI REPRESENTATIVE HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES) RESULTING FROM YOUR SELECTION OR USE OF THIS DOCUMENT OR ANY INFORMATION, APPARATUS, METHOD, PROCESS, OR SIMILAR ITEM DISCLOSED IN THIS DOCUMENT.

REFERENCE HEREIN TO ANY SPECIFIC COMMERCIAL PRODUCT, PROCESS, OR SERVICE BY ITS TRADE NAME, TRADEMARK, MANUFACTURER, OR OTHERWISE, DOES NOT NECESSARILY CONSTITUTE OR IMPLY ITS ENDORSEMENT, RECOMMENDATION, OR FAVORING BY EPRI.

The Electric Power Research Institute (EPRI), prepared this report.

This is an EPRI Technical Update report. A Technical Update report is intended as an informal report of continuing research, a meeting, or a topical study. It is not a final EPRI technical report.

NOTE

For further information about EPRI, call the EPRI Customer Assistance Center at 800.313.3774 or e-mail askepri@epri.com.

Electric Power Research Institute, EPRI, and TOGETHER...SHAPING THE FUTURE OF ELECTRICITY are registered service marks of the Electric Power Research Institute, Inc.

Copyright © 2020 Electric Power Research Institute, Inc. All rights reserved.

ACKNOWLEDGMENTS

The Electric Power Research Institute (EPRI), prepared this report.

Principal Investigator

D. Lowe

This report describes research sponsored by EPRI.

This publication is a corporate document that should be cited in the literature in the following manner:

Outage Data Initiative Test Script. EPRI, Palo Alto, CA: 2020. 3002017954.

ABSTRACT

EPRI is collaborating with Oakridge National Laboratory (ORNL), utilities, and technology companies to develop national outage data standards for increased data accuracy, timely information dissemination to the public, and faster response by emergency management personnel and first responders. EPRI's Outage Data Initiative (ODI) Test Script describes 27 total test cases that can be used to demonstrate compliance with various facets of the standards. These test cases are written for a Representational State Transfer (REST) service that uses Extensible Markup Language (XML) payload. The test cases are provided via SoapUI, a free, open-source tool that allows testing of SOAP or REST web services. Each use case is prepopulated and only needs the proper Uniform Resource Identifier (URI) changed. Files are not immutable and additional requests can be saved as needed.

Keywords

Web services

System integration

Enterprise architecture

Service-oriented architecture

Outage data

Test Script

CONTENTS

ABSTRACT	v
1 HOW TO USE THIS TEST SCRIPT.....	1-1
SoapUI	1-1
Schema Validation	1-3
2 THE PUBOUTAGES SCHEMA	2-1
Outage.....	2-1
ActualPeriod.....	2-1
EstimatedPeriod.....	2-1
EstimatedRestorationTime	2-2
Incident.....	2-2
Location.....	2-3
OutageArea.....	2-5
3 POST REQUESTS	3-1
Use Case ODI-ADD-MND-MRID (Add Mandatory mRID): A POST Request to Add Outage Data With mRID as an Integer Type	3-1
Use Case ODI-ADD-MND-RST (Add Mandatory Reported Start Time): A POST Request to Add Outage Data With Missing Reported Start Time.....	3-2
Use Case ODI-ADD-MND-SK (Add Mandatory statusKind): A POST Request with Missing StatusKind	3-3
Use Case ODI-ADD-ALL (All Fields Present): A POST Request to Add Outage Data With All Fields Present.....	3-4
Use Case ODI-ADD-OPT-AP1 (Optional ActualPeriod): A POST Request to add Outage Data With All Fields Present Except Actualperiod	3-6
Use Case ODI-ADD-OPT-AP2 (ActualPeriod Missing Field): A POST Request to add Outage Data Missing Field From ActualPeriod	3-7
Use Case ODI-ADD-OPT-EP1 (Optional EstimatedPeriod): A POST Request to add Outage Data With All Fields Present Except Estimatedperiod	3-8
Use Case ODI-ADD-OPT-EP2 (EstimatedPeriod Missing Field): A POST Request to add Outage Data With Missing Field from EstimatedPeriod.....	3-9
Use Case ODI-ADD-OPT-ERT1 (Optional EstimatedRestorationTime): A POST Request to add Outage Data With All Fields Present Except EstimatedRestorationTime	3-10
Use Case ODI-ADD-OPT-ERT2 (EstimatedRestorationTime Missing Field): A POST Request to add Outage Data With Missing Field from EstimatedRestorationTime	3-11
Use Case ODI-ADD-MTO-PP1 (ManyToOne PositionPoints): A POST Request to add Outage Data With Multiple Position Points Provided.....	3-13
Use Case ODI-ADD-MTO-PP2 (ManyToOne PositionPoints): A POST Request to add Outage Data With Multiple Position Points Provided With Missing Mandatory Field.....	3-14
Use Case ODI-ADD-MTO-OA1 (ManyToOne OutageAreas): A POST Request to add Outage Data With Multiple Outage Areas Provided	3-16

Use Case ODI-ADD-MTO-OA2 (ManyToOne OutageAreas): A POST Request to add Outage Data With Multiple Outage Areas Provided With Missing Mandatory Field.....	3-17
Use Case ODI-ADD-MTO-INC1 (ManyToOne Incidents): A POST Request to add Outage Data With Multiple Incidents Provided.....	3-18
Use Case ODI-ADD-MTO-INC2 (ManyToOne Incidents): A POST Request to add Outage Data With Multiple Incidents Provided With Missing Field.....	3-20
4 PUT REQUESTS	4-1
Use Case ODI-UPD-ALL (Update All Fields): A PUT Request Changing Data From ODI-ADD-ALL	4-1
Use Case ODI-UPD-OPT-AP1 (Update Optional ActualPeriod): A PUT Request to Change ODI-ADD-OPT-AP1 by Adding Actualperiod Data.....	4-2
Use Case ODI-UPD-OPT-EP1 (Update Optional EstimatedPeriod): A POST Request to Change ODI-ADD-OPT-EP1 by Adding Estimatedperiod Data.....	4-3
Use Case ODI-UPD-OPT-ERT1 (Update Optional EstimatedRestorationTime): A PUT Request to Change ODI-ADD-OPT-ERT1 by Adding EstimatedRestorationTime	4-4
Use Case ODI-UPD-MTO-PP1 (Update Multiple PositionPoints): A PUT Request to Change ODI-ADD-MTO-PP1 by Removing Extra PositionPoints	4-6
Use Case ODI-UPD-MTO-OA1 (Update Multiple OutageAreas): A PUT Request to Change ODI-ADD-MTO-OA1 by Removing Extra OutageAreas.....	4-7
Use Case ODI-UPD-MTO-INC1 (Update ManyToOne Incidents): A PUT Request to Change ODI-ADD-MTO-INC1 by Removing Extra Incidents.....	4-8
5 PATCH REQUESTS.....	5-1
Use Case ODI-PATCH-1FIELD (Patch One Field): A PATCH Request to Change One Misabeled Field from ODI-ADD-ALL	5-1
6 GET REQUESTS.....	6-1
Use Case ODI-GET-ALL (Get All Outages): A GET Request to Retrieve All Outage Data.....	6-1
Use Case ODI-GET-ONE (Get Specified Outage): A GET Request to Retrieve Specific Outage Data.....	6-1
Use Case ODI-DEL-ONE (Delete Outage): A DELETE Request to Remove Outage Data Created Earlier	6-2

LIST OF FIGURES

Figure 1-1 Importing a project in SoapUI	1-1
Figure 1-2 Same file structure for this test script in SoapUI	1-2
Figure 1-3 Sending a POST message in SoapUI using their REST interface	1-3
Figure 2-1 Schema view of “actualPeriod” data type	2-1
Figure 2-2 Schema view of “estimatedPeriod” data type	2-2
Figure 2-3 Schema view of “estimatedRestorationTime” data type	2-2
Figure 2-4 Schema view of “Incident” data type	2-3
Figure 2-5 Schema view of “Location” data type	2-4
Figure 2-6 Schema view of “CoordinateSystem” and “PositionPoints” data types	2-5
Figure 2-7 Schema view of “OutageArea” data type	2-6
Figure 6-1 Setting optional parameters for a RESTful URI in SoapUI	6-1
Figure 6-2 View of all added parameters in a RESTful URI in SoapUI	6-1

1

HOW TO USE THIS TEST SCRIPT

This document serves as a reference for the provided SOAP UI use cases to test the outages web service. These use cases are written for a REST service that uses an XML payload.

These test cases are arranged in a specific pattern. The first test case for each category that has a number at the end (e.g. ODI-ADD-OPT-AP1) should succeed, while the second in the sequence should fail, typically due to a missing mandatory field. In these instances, an error code 400 should be presented due to being unable to validate against the schema. Similarly, all test cases with MND in the title (e.g. ODI-ADD-MND-MRID) should fail and receive some kind of error message by the receiving system.

A SOAP UI file is provided for testing, but if another testing tool such as Postman is desired, the Sample XML folder contains each test case outlined in this document. A brief explanation of how to use the SoapUI tool is described in the following section.

SoapUI

To use these test cases in SoapUI, first download the free software from <https://www.soapui.org>. This is free software that can be used for testing SOAP or RESTful Web Services.

Open SoapUI, select File, and then Import Project.

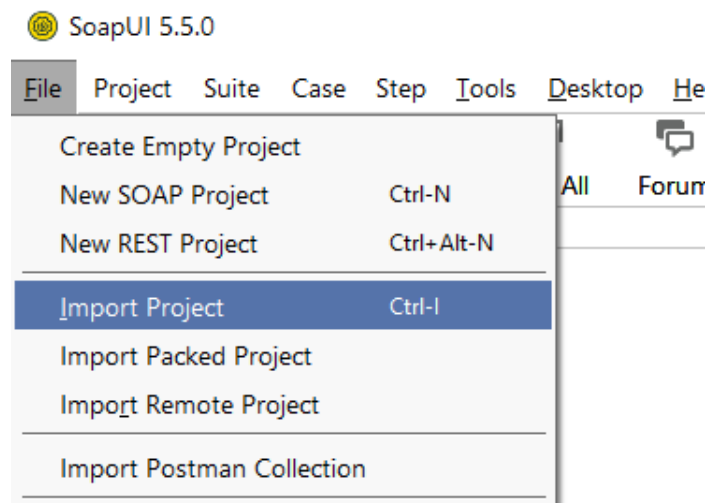


Figure 1-1
Importing a project in SoapUI

Select the provided SoapUI file, *Outage-Data-soapui-project.xml*. This will open the project and should have a screen similar to the one below.

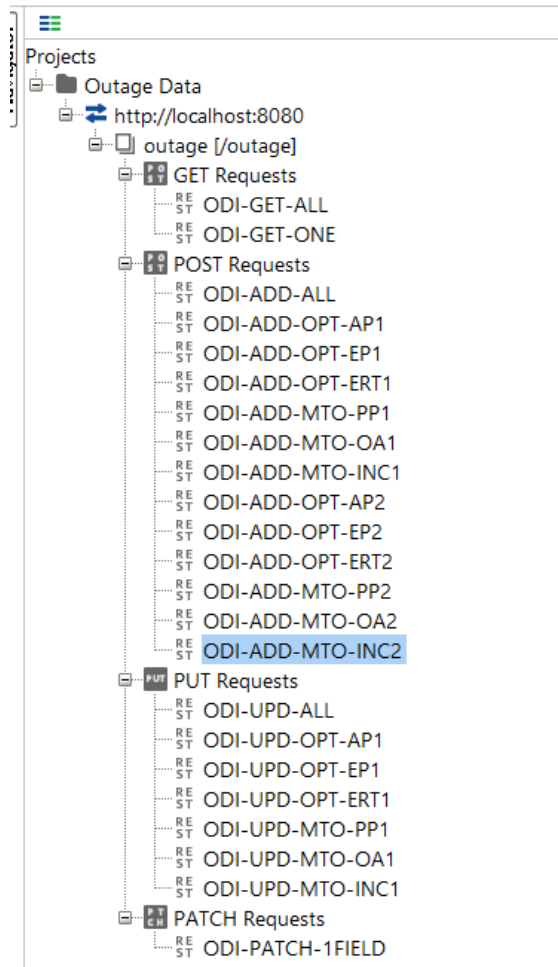


Figure 1-2
Same file structure for this test script in SoapUI

Where applicable, such as with the POST, PUT, and PATCH requests, the use case XML will be auto-populated and the only adjustment that will need to be made is putting in the proper endpoint address representing the hosted web service.

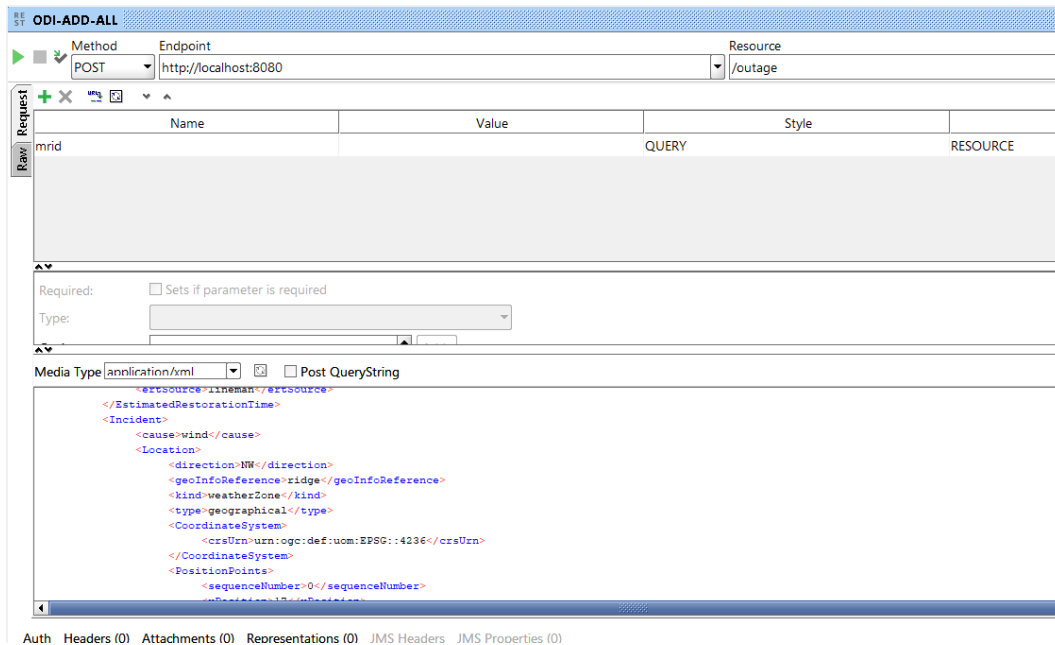


Figure 1-3
Sending a POST message in SoapUI using their REST interface

In the screenshot above, the only things that will need to be changed are the Endpoint and Resource fields. Once those are set to properly represent the webservice URI, click the green “play” button in the corner of the screen to send the message.

Schema Validation

A key point of interoperability is conforming to the XSDs so that all parties are sending the same type of message. As such it is important that messages conform to the given schema, PubOutages.xsd. It is sufficient if a received or generated XML file passes XML validation and is semantically equivalent, so as a result it’s possible that a system may send slightly different messages than the ones shown in this test script. XML namespaces may be assigned alternative prefixes or be defined in other places in the XML document besides the header of the XML document (e.g. within a parent element).

As an example, below are two XML documents that are semantically equivalent as far as XSD validation is concerned.

```

<?xml version="1.0" encoding="UTF-8"?>
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID>fc9758b7-d121-4233-b9f0-a6ef288143fa</mRID>
    <cause>auto accident</cause>
    <causeKind>treeDown</causeKind>
    <communityDescriptor>Bellevue</communityDescriptor>
    <customersRestored>5</customersRestored>
    <metersAffected>107</metersAffected>
    <originalCustomersServed>112</originalCustomersServed>
    <originalMetersAffected>112</originalMetersAffected>
    <outageKind>partiallyRestored</outageKind>
    <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
    <statusKind>fieldComplete</statusKind>
    <utilityDisclaimer>none</utilityDisclaimer>
    <actualPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </actualPeriod>
    <estimatedPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </estimatedPeriod>
    <EstimatedRestorationTime>
      <confidenceKind>high</confidenceKind>
      <ert>2019-12-17T09:30:47Z</ert>
      <ertSource>control center</ertSource>
    </EstimatedRestorationTime>
    <Incident>
      <cause>wind</cause>
      <Location>
        <direction>NW</direction>
        <geoInfoReference>lake</geoInfoReference>
        <kind>weatherZone</kind>
        <type>geographical</type>
        <CoordinateSystem>
          <crsUrn>EPSG:4326</crsUrn>
        </CoordinateSystem>
        <PositionPoints>
          <sequenceNumber>0</sequenceNumber>
          <xPosition>33</xPosition>
          <yPosition>15</yPosition>
        </PositionPoints>
      </Location>
    </Incident>
    <OutageArea>
      <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
      <metersServed>112</metersServed>
      <outageAreaKind>county</outageAreaKind>
    </OutageArea>
  </Outage>
</PubOutages>

```

```

<?xml version="1.0" encoding="UTF-8"?>
<ns2:PubOutages xmlns:ns2="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <ns2:Outage>
    <ns2:mRID>fc9758b7-d121-4233-b9f0-a6ef288143fa</ns2:mRID>
    <ns2:cause>auto accident</ns2:cause>
    <ns2:causeKind>treeDown</ns2:causeKind>
    <ns2:communityDescriptor>Bellevue</ns2:communityDescriptor>
    <ns2:customersRestored>5</ns2:customersRestored>
    <ns2:metersAffected>107</ns2:metersAffected>
    <ns2:originalCustomersServed>112</ns2:originalCustomersServed>
    <ns2:originalMetersAffected>112</ns2:originalMetersAffected>
    <ns2:outageKind>partiallyRestored</ns2:outageKind>
    <ns2:reportedStartTime>2019-12-17T09:30:47Z</ns2:reportedStartTime>
    <ns2:statusKind>fieldComplete</ns2:statusKind>
    <ns2:utilityDisclaimer>none</ns2:utilityDisclaimer>
    <ns2:actualPeriod>
      <ns2:end>2019-12-17T09:30:47Z</ns2:end>
      <ns2:start>2019-12-17T09:30:47Z</ns2:start>
    </ns2:actualPeriod>
    <ns2:estimatedPeriod>
      <ns2:end>2019-12-17T09:30:47Z</ns2:end>
      <ns2:start>2019-12-17T09:30:47Z</ns2:start>
    </ns2:estimatedPeriod>
    <ns2:EstimatedRestorationTime>
      <ns2:confidenceKind>high</ns2:confidenceKind>
      <ns2:ert>2019-12-17T09:30:47Z</ns2:ert>
      <ns2:ertSource>control center</ns2:ertSource>
    </ns2:EstimatedRestorationTime>
    <ns2:Incident>
      <ns2:cause>wind</ns2:cause>
      <ns2:Location>
        <ns2:direction>NW</ns2:direction>
        <ns2:geoInfoReference>lake</ns2:geoInfoReference>
        <ns2:kind>weatherZone</ns2:kind>
        <ns2:type>geographical</ns2:type>
        <ns2:CoordinateSystem>
          <ns2:crsUrn>EPSG:4326</ns2:crsUrn>
        </ns2:CoordinateSystem>
        <ns2:PositionPoints>
          <ns2:sequenceNumber>0</ns2:sequenceNumber>
          <ns2:xPosition>33</ns2:xPosition>
          <ns2:yPosition>15</ns2:yPosition>
        </ns2:PositionPoints>
      </ns2:Location>
    </ns2:Incident>
    <ns2:OutageArea>
      <ns2:earliestReportedTime>2019-12-17T09:30:47Z</ns2:earliestReportedTime>
      <ns2:metersServed>112</ns2:metersServed>
      <ns2:outageAreaKind>county</ns2:outageAreaKind>
    </ns2:OutageArea>
  </ns2:Outage>
</ns2:PubOutages>

```


2

THE PUBOUTAGES SCHEMA

This test script is based off of the PubOutages.xsd schema. All messages should be validating against the same schema, and this section is intended to briefly describe key points of subsections of the schema that will be used in this test script.

Outage

There can be ZeroToMany Outages in a PubOutage. Outage itself has many optional fields with the only mandatory fields being its mRID, reportedStartTime, and statusKind. The CIM standard requires the use of a UUID for its mRID, which is enforced by the schema. The standard does not enforce how utilities store this data, so fields such as *actualPeriod* may not even be in use by those who simply wish to delete an outage rather than retain it for record-keeping purposes. As a result, many of these fields are marked optional.

ActualPeriod

The actualPeriod field, used to show when an outage actually starts and ends rather than it was first reported, is optional in the subschema. If invoked, all of actualPeriod's fields become mandatory. Below is a snippet of the schema view of actualPeriod in the PubOutages XSD.

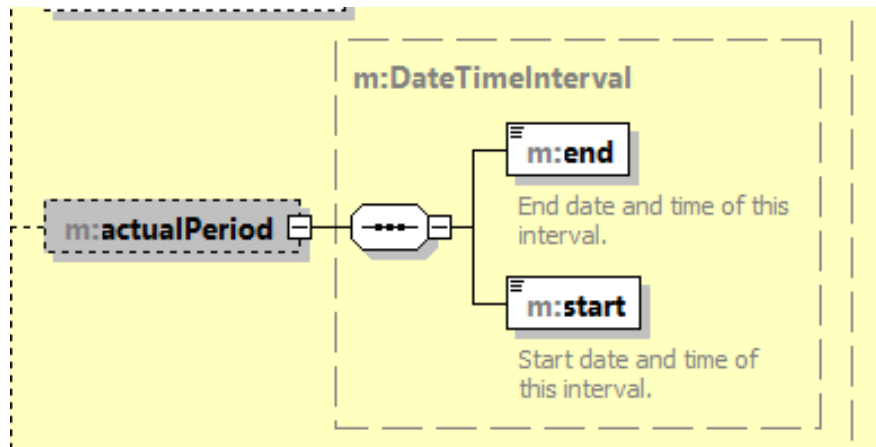


Figure 2-1
Schema view of “actualPeriod” data type

EstimatedPeriod

The estimatedPeriod field, like actualPeriod, is optional. However, if it used, all fields within are mandatory. The estimatedPeriod schema view is shown below. This field is used to represent estimations for when the outage started and will end.

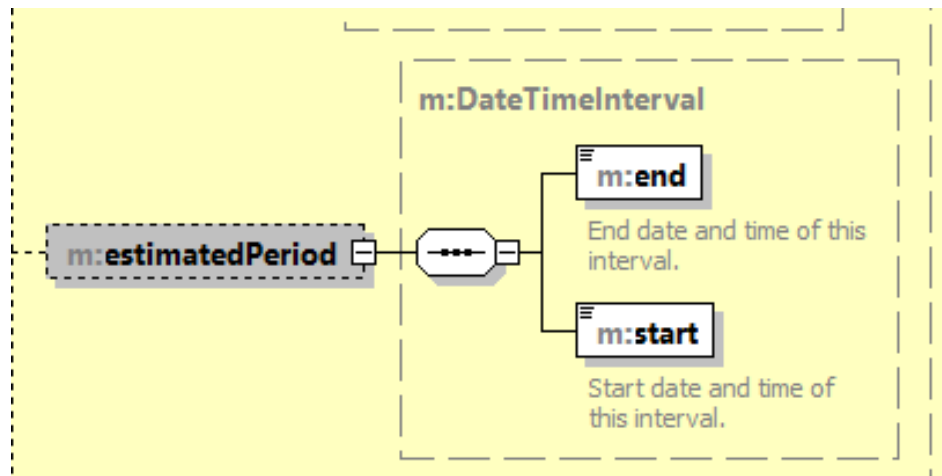


Figure 2-2
Schema view of “estimatedPeriod” data type

EstimatedRestorationTime

The estimatedRestorationTime field is optional, but once invoked has three mandatory fields that must be provided. The schema view of estimatedRestorationTime from PubOutages.xsd is shown below.

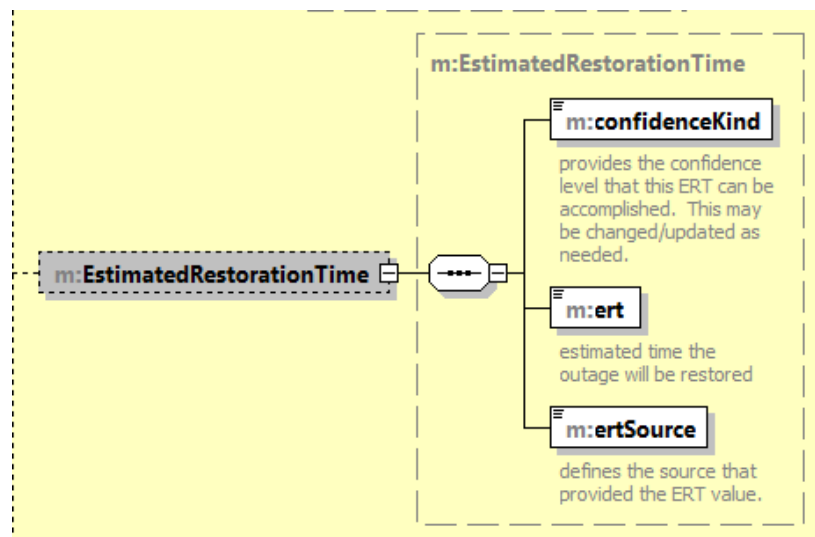


Figure 2-3
Schema view of “estimatedRestorationTime” data type

Incident

The Incident field is different from the others in that, while it is optional, it has unbounded cardinality. When designing a database to support this schema, it becomes a bit more complicated as the Incident field itself has other fields that possess similar unbounded cardinality. All fields in Incident are required if Incident is supplied.

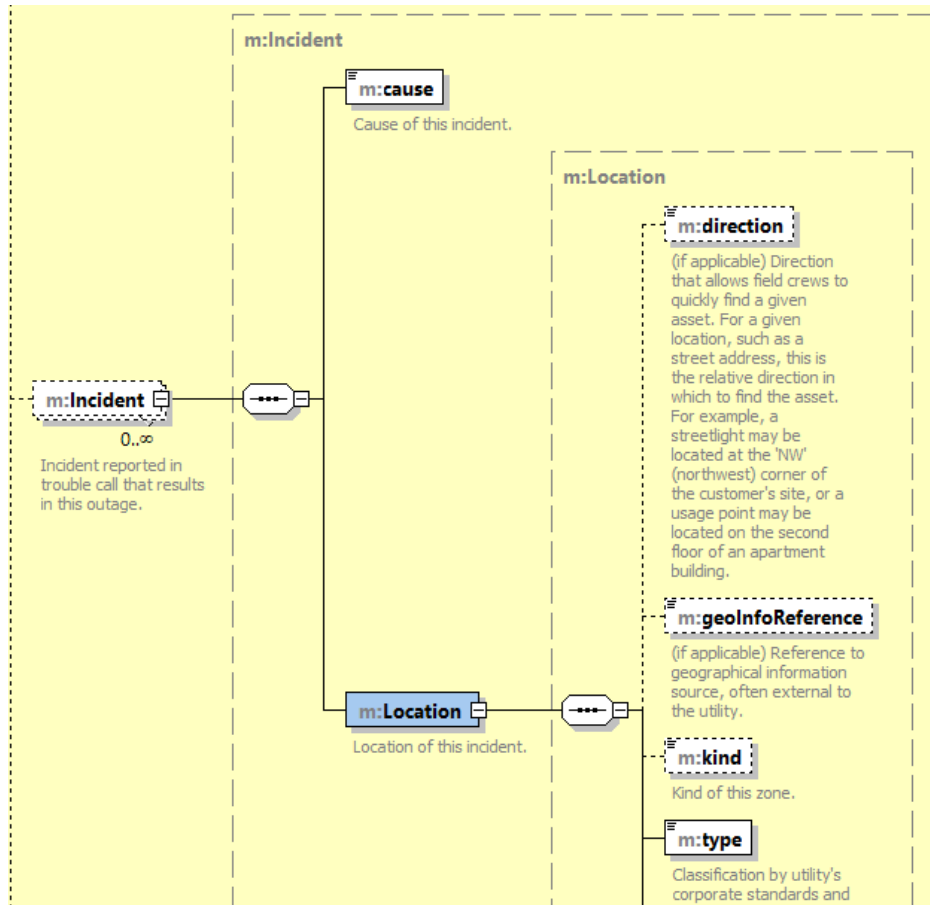


Figure 2-4
Schema view of "Incident" data type

Location

Location is a mandatory field within Incident that contains its own fields with both OneToOne and OneToMany cardinality. Note that almost all fields are mandatory except for **kind**.

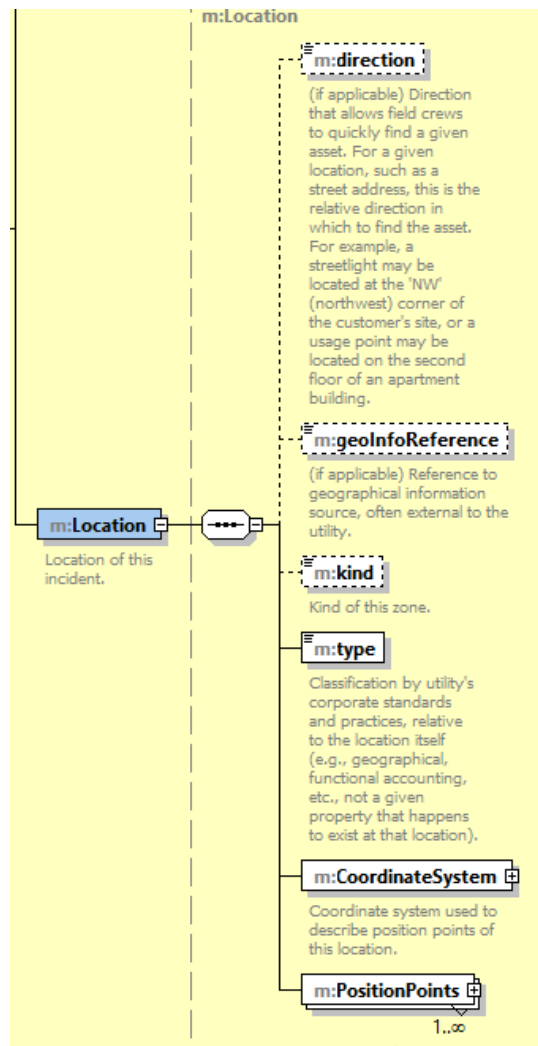


Figure 2-5
Schema view of “Location” data type

CoordinateSystem

CoordinateSystem is a mandatory field within Location that has only one element of its own, **crsUrn**, which must be provided.

PositionPoints

PositionPoints is a mandatory field within Location that has OneToMany cardinality (i.e. there can multiple PositionPoints within a given Location). All of PositionPoints' fields are mandatory except for **zPosition**.

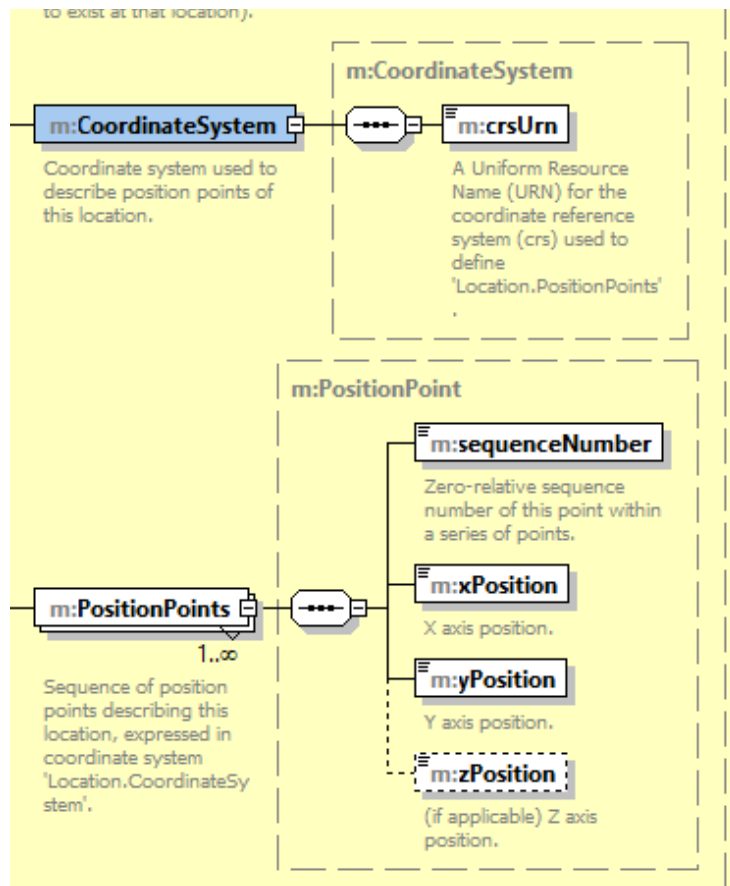


Figure 2-6
Schema view of “CoordinateSystem” and “PositionPoints” data types

OutageArea

OutageArea is an optional field with ZeroToMany cardinality and three mandatory fields. Although outageArea itself is optional, if it is used then all three of its subelements must be filled. Below is a picture of the schema representation of outageArea.

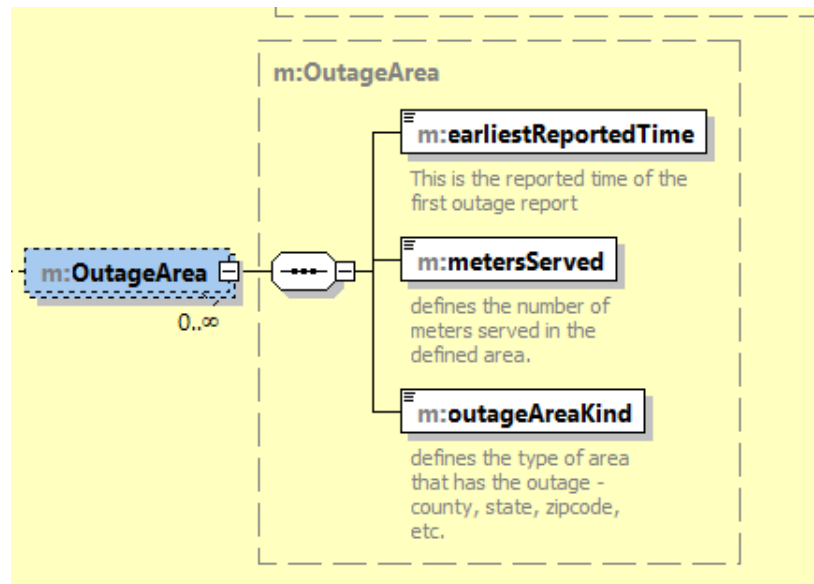


Figure 2-7
Schema view of “OutageArea” data type

3

POST REQUESTS

Use Case ODI-ADD-MND-MRID (Add Mandatory mRID): A POST Request to Add Outage Data With mRID as an Integer Type

As per CIM conventions, mRIDs are of a UUID type rather than an integer. Not only does this provide global uniqueness, but it allows for easier exchange of data between two different utilities as it should be immediately clear what outage is being referred to when using a UUID-type for the mRID. However, if both are using auto-incremented integer values, it's possible that two different outages for two different utilities could possess the same mRID. In the following test case, the system should reject the creation of this outage as its mRID is not a UUID.

Result Expectation: Message should fail with error code due to incorrect format for attribute *mRID*.

```
<?xml version="1.0" encoding="UTF-8"?>
<!--Sample XML file generated by XMLSpy v2018 (x64) (http://www.altova.com)-->
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID>93018</mRID>
    <cause>weather</cause>
    <causeKind>treeDown</causeKind>
    <communityDescriptor>Karns</communityDescriptor>
    <customersRestored>3</customersRestored>
    <metersAffected>12</metersAffected>
    <originalCustomersServed>12</originalCustomersServed>
    <originalMetersAffected>12</originalMetersAffected>
    <outageKind>partiallyRestored</outageKind>
    <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
    <statusKind>fieldComplete</statusKind>
    <utilityDisclaimer>none</utilityDisclaimer>
    <actualPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </actualPeriod>
    <estimatedPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </estimatedPeriod>
    <EstimatedRestorationTime>
      <confidenceKind>high</confidenceKind>
      <ert>2019-12-17T09:30:47Z</ert>
      <ertSource>lineman</ertSource>
    </EstimatedRestorationTime>
    <Incident>
      <cause>wind</cause>
      <Location>
        <direction>NW</direction>
```

```

        <geoInfoReference>ridge</geoInfoReference>
        <kind>weatherZone</kind>
        <type>geographical</type>
        <CoordinateSystem>
            <crsUrn>EPSG:4326</crsUrn>
        </CoordinateSystem>
        <PositionPoints>
            <sequenceNumber>0</sequenceNumber>
            <xPosition>17</xPosition>
            <yPosition>31</yPosition>
        </PositionPoints>
    </Location>
</Incident>
<OutageArea>
    <earliestReportedTime>2019-12-
17T09:30:47Z</earliestReportedTime>
    <metersServed>12</metersServed>
    <outageAreaKind>county</outageAreaKind>
</OutageArea>
</Outage>
</PubOutages>

```

Use Case ODI-ADD-MND-RST (Add Mandatory Reported Start Time): A POST Request to Add Outage Data With Missing Reported Start Time

Reported Start Time is a mandatory attribute of the PubOutages schema. As a result, any message that's missing the reported start time should be met with an error message. Should it later be discovered that the actual start time differs from what is initially reported, this can be entered under the **actualPeriod** element.

Result Expectation: Message should fail with error code due to missing mandatory attribute *reportedStartTime*.

```

<?xml version="1.0" encoding="UTF-8"?>
<!--Sample XML file generated by XMLSpy v2018 (x64) (http://www.altova.com)-->
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
    <Outage>
        <mRID>3fbbc649-3e42-401b-bbbc-1ab1a1bcbbbe</mRID>
        <cause>weather</cause>
        <causeKind>treeDown</causeKind>
        <communityDescriptor>Karns</communityDescriptor>
        <customersRestored>3</customersRestored>
        <metersAffected>12</metersAffected>
        <originalCustomersServed>12</originalCustomersServed>
        <originalMetersAffected>12</originalMetersAffected>
        <outageKind>partiallyRestored</outageKind>
        <statusKind>fieldComplete</statusKind>
        <utilityDisclaimer>none</utilityDisclaimer>
        <actualPeriod>
            <end>2019-12-17T09:30:47Z</end>
            <start>2019-12-17T09:30:47Z</start>
        </actualPeriod>
    </Outage>
</PubOutages>

```

```

        <estimatedPeriod>
            <end>2019-12-17T09:30:47Z</end>
            <start>2019-12-17T09:30:47Z</start>
        </estimatedPeriod>
        <EstimatedRestorationTime>
            <confidenceKind>high</confidenceKind>
            <ert>2019-12-17T09:30:47Z</ert>
            <ertSource>lineman</ertSource>
        </EstimatedRestorationTime>
        <Incident>
            <cause>wind</cause>
            <Location>
                <direction>NW</direction>
                <geoInfoReference>ridge</geoInfoReference>
                <kind>weatherZone</kind>
                <type>geographical</type>
                <CoordinateSystem>
                    <crsUrn>EPSG:4326</crsUrn>
                </CoordinateSystem>
                <PositionPoints>
                    <sequenceNumber>0</sequenceNumber>
                    <xPosition>17</xPosition>
                    <yPosition>31</yPosition>
                </PositionPoints>
            </Location>
        </Incident>
        <OutageArea>
            <earliestReportedTime>2019-12-
17T09:30:47Z</earliestReportedTime>
            <metersServed>12</metersServed>
            <outageAreaKind>county</outageAreaKind>
        </OutageArea>
    </Outage>
</PubOutages>

```

Use Case ODI-ADD-MND-SK (Add Mandatory statusKind): A POST Request with Missing StatusKind

In the PubOutage schema, **statusKind** is a mandatory element that should always have some value attached to it, whether it's assigned, enroute, awaitingCrewAssignment, or fieldComplete.

Result Expectation: Message should fail with error code due to missing mandatory attribute *statusKind*.

```

<?xml version="1.0" encoding="UTF-8"?>
<!--Sample XML file generated by XMLSpy v2018 (x64) (http://www.altova.com)-->
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
    <Outage>
        <mRID>3fbbc649-3e42-401b-bbbc-1ab1a1bcbbbe</mRID>
        <cause>weather</cause>
        <causeKind>treeDown</causeKind>
        <communityDescriptor>Karns</communityDescriptor>
        <customersRestored>3</customersRestored>
    </Outage>
</PubOutages>

```

```

<metersAffected>12</metersAffected>
<originalCustomersServed>12</originalCustomersServed>
<originalMetersAffected>12</originalMetersAffected>
<outageKind>partiallyRestored</outageKind>
<utilityDisclaimer>none</utilityDisclaimer>
<actualPeriod>
  <end>2019-12-17T09:30:47Z</end>
  <start>2019-12-17T09:30:47Z</start>
</actualPeriod>
<estimatedPeriod>
  <end>2019-12-17T09:30:47Z</end>
  <start>2019-12-17T09:30:47Z</start>
</estimatedPeriod>
<EstimatedRestorationTime>
  <confidenceKind>high</confidenceKind>
  <ert>2019-12-17T09:30:47Z</ert>
  <ertSource>lineman</ertSource>
</EstimatedRestorationTime>
<Incident>
  <cause>wind</cause>
  <Location>
    <direction>NW</direction>
    <geoInfoReference>ridge</geoInfoReference>
    <kind>weatherZone</kind>
    <type>geographical</type>
    <CoordinateSystem>
      <crsUrn>EPSG:4326</crsUrn>
    </CoordinateSystem>
    <PositionPoints>
      <sequenceNumber>0</sequenceNumber>
      <xPosition>17</xPosition>
      <yPosition>31</yPosition>
    </PositionPoints>
  </Location>
</Incident>
<OutageArea>
  <earliestReportedTime>2019-12-
17T09:30:47Z</earliestReportedTime>
  <metersServed>12</metersServed>
  <outageAreaKind>county</outageAreaKind>
</OutageArea>
</Outage>
</PubOutages>

```

Use Case ODI-ADD-ALL (All Fields Present): A POST Request to Add Outage Data With All Fields Present

This use case adds new Outage data that fills all possible fields for an outage. Note that this test case does not add multiples of unbounded fields such as PositionPoints, OutageArea, etc. The XML for this request is shown below.

Result Expectation: Outage message is processed successfully.

```

<?xml version="1.0" encoding="UTF-8"?>
<!--Sample XML file generated by XMLSpy v2018 (x64) (http://www.altova.com)-->
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID>3fbbc649-3e42-401b-bbbc-1ab1a1bcbbbe</mRID>
    <cause>weather</cause>
    <causeKind>treeDown</causeKind>
    <communityDescriptor>Karns</communityDescriptor>
    <customersRestored>3</customersRestored>
    <metersAffected>12</metersAffected>
    <originalCustomersServed>12</originalCustomersServed>
    <originalMetersAffected>12</originalMetersAffected>
    <outageKind>partiallyRestored</outageKind>
    <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
    <statusKind>fieldComplete</statusKind>
    <utilityDisclaimer>none</utilityDisclaimer>
    <actualPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </actualPeriod>
    <estimatedPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </estimatedPeriod>
    <EstimatedRestorationTime>
      <confidenceKind>high</confidenceKind>
      <ert>2019-12-17T09:30:47Z</ert>
      <ertSource>lineman</ertSource>
    </EstimatedRestorationTime>
    <Incident>
      <cause>wind</cause>
      <Location>
        <direction>NW</direction>
        <geoInfoReference>ridge</geoInfoReference>
        <kind>weatherZone</kind>
        <type>geographical</type>
        <CoordinateSystem>
          <crsUrn>EPSG:4326</crsUrn>
        </CoordinateSystem>
        <PositionPoints>
          <sequenceNumber>0</sequenceNumber>
          <xPosition>17</xPosition>
          <yPosition>31</yPosition>
        </PositionPoints>
      </Location>
    </Incident>
    <OutageArea>
      <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
      <metersServed>12</metersServed>
      <outageAreaKind>county</outageAreaKind>
    </OutageArea>
  </Outage>
</PubOutages>

```

Use Case ODI-ADD-OPT-AP1 (Optional ActualPeriod): A POST Request to add Outage Data With All Fields Present Except Actualperiod

This use case is a more typical POST message in that it is missing the *actualPeriod* element. Since the *actualPeriod* is more likely to be added via PUT or PATCH in REST, or as a change in the CIM SOAP standard, most messages should be missing the *actualPeriod* element when first created.

Result Expectation: Message should post successfully with all fields present except for *actualPeriod*.

```
<?xml version="1.0" encoding="UTF-8"?>
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID>fc9758b7-d121-4233-b9f0-a6ef288143fa</mRID>
    <cause>auto accident</cause>
    <causeKind>treeDown</causeKind>
    <communityDescriptor>Bellevue</communityDescriptor>
    <customersRestored>5</customersRestored>
    <metersAffected>107</metersAffected>
    <originalCustomersServed>112</originalCustomersServed>
    <originalMetersAffected>112</originalMetersAffected>
    <outageKind>partiallyRestored</outageKind>
    <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
    <statusKind>fieldComplete</statusKind>
    <utilityDisclaimer>none</utilityDisclaimer>
    <estimatedPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </estimatedPeriod>
    <EstimatedRestorationTime>
      <confidenceKind>high</confidenceKind>
      <ert>2019-12-17T09:30:47Z</ert>
      <ertSource>control center</ertSource>
    </EstimatedRestorationTime>
    <Incident>
      <cause>wind</cause>
      <Location>
        <direction>NW</direction>
        <geoInfoReference>lake</geoInfoReference>
        <kind>weatherZone</kind>
        <type>geographical</type>
        <CoordinateSystem>
          <crsUrn>EPSG:4326</crsUrn>
        </CoordinateSystem>
        <PositionPoints>
          <sequenceNumber>0</sequenceNumber>
          <xPosition>33</xPosition>
          <yPosition>15</yPosition>
        </PositionPoints>
      </Location>
    </Incident>
  </Outage>
</PubOutages>
```

```

    <OutageArea>
      <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
      <metersServed>112</metersServed>
      <outageAreaKind>county</outageAreaKind>
    </OutageArea>
  </Outage>
</PubOutages>

```

Use Case ODI-ADD-OPT-AP2 (ActualPeriod Missing Field): A POST Request to add Outage Data Missing Field From ActualPeriod

In this use case, *actualPeriod* is missing a mandatory field, *end*. *ActualPeriod* should be used to represent the actual start and end time of the outage and is thus most likely to be added through a PUT or PATCH request when using REST, or a *change* message if implemented using the CIM SOAP standard.

Result Expectation: Message should fail with error code due to mandatory field *end* missing from *actualPeriod*.

```

<?xml version="1.0" encoding="UTF-8"?>
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID>956c434f-0281-4748-ad27-e1c708ce8800</mRID>
    <cause>auto accident</cause>
    <causeKind>treeDown</causeKind>
    <communityDescriptor>Bellevue</communityDescriptor>
    <customersRestored>5</customersRestored>
    <metersAffected>107</metersAffected>
    <originalCustomersServed>112</originalCustomersServed>
    <originalMetersAffected>112</originalMetersAffected>
    <outageKind>partiallyRestored</outageKind>
    <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
    <statusKind>fieldComplete</statusKind>
    <utilityDisclaimer>none</utilityDisclaimer>
    <actualPeriod>
      <start>2019-12-17T09:30:47Z</start>
    </actualPeriod>
    <estimatedPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </estimatedPeriod>
    <EstimatedRestorationTime>
      <confidenceKind>high</confidenceKind>
      <ert>2019-12-17T09:30:47Z</ert>
      <ertSource>control center</ertSource>
    </EstimatedRestorationTime>
    <Incident>
      <cause>wind</cause>
      <Location>
        <direction>NW</direction>
        <geoInfoReference>lake</geoInfoReference>
        <kind>weatherZone</kind>

```

```

    <type>geographical</type>
    <CoordinateSystem>
      <crsUrn>EPSG:4326</crsUrn>
    </CoordinateSystem>
    <PositionPoints>
      <sequenceNumber>0</sequenceNumber>
      <xPosition>33</xPosition>
      <yPosition>15</yPosition>
    </PositionPoints>
  </Location>
</Incident>
<OutageArea>
  <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
  <metersServed>112</metersServed>
  <outageAreaKind>county</outageAreaKind>
</OutageArea>
</Outage>
</PubOutages>

```

Use Case ODI-ADD-OPT-EP1 (Optional EstimatedPeriod): A POST Request to add Outage Data With All Fields Present Except Estimatedperiod

In this use case, the optional *estimatedPeriod* is missing from the initial POST request. Many utilities opt out of providing information about estimated start and end times of outages and thus it's likely a POST request without that information could be sent.

Result Expectation: Outage message is processed successfully without *estimatedPeriod* attribute.

```

<?xml version="1.0" encoding="UTF-8"?>
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID>fd532f2d-37d8-423a-a08e-8f9e4c4e6283</mRID>
    <cause>animal</cause>
    <causeKind>poleDown</causeKind>
    <communityDescriptor>Belltown</communityDescriptor>
    <customersRestored>177</customersRestored>
    <metersAffected>835</metersAffected>
    <originalCustomersServed>1012</originalCustomersServed>
    <originalMetersAffected>1012</originalMetersAffected>
    <outageKind>partiallyRestored</outageKind>
    <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
    <statusKind>arrived</statusKind>
    <utilityDisclaimer>none</utilityDisclaimer>
    <actualPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </actualPeriod>
    <EstimatedRestorationTime>
      <confidenceKind>high</confidenceKind>
      <ert>2019-12-17T09:30:47Z</ert>
      <ertSource>control center</ertSource>
    </EstimatedRestorationTime>
  </Outage>
</PubOutages>

```

```

</EstimatedRestorationTime>
<Incident>
  <cause>wind</cause>
  <Location>
    <direction>W</direction>
    <geoInfoReference>park</geoInfoReference>
    <kind>weatherZone</kind>
    <type>geographical</type>
    <CoordinateSystem>
      <crsUrn>EPSG:4326</crsUrn>
    </CoordinateSystem>
    <PositionPoints>
      <sequenceNumber>0</sequenceNumber>
      <xPosition>15</xPosition>
      <yPosition>66</yPosition>
    </PositionPoints>
  </Location>
</Incident>
<OutageArea>
  <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
  <metersServed>1012</metersServed>
  <outageAreaKind>county</outageAreaKind>
</OutageArea>
</Outage>
</PubOutages>

```

Use Case ODI-ADD-OPT-EP2 (EstimatedPeriod Missing Field): A POST Request to add Outage Data With Missing Field from EstimatedPeriod

In this test case, estimatedPeriod is missing a mandatory field, *end*. When sending information regarded the *estimatedPeriod*, both a start and end time must be provided.

Result Expectation: Message should fail with error code due to missing mandatory attribute *end* for *estimatedPeriod*.

```

<?xml version="1.0" encoding="UTF-8"?>
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID>b4babedd-4e92-46c7-8659-a497061c5ff3</mRID>
    <cause>animal</cause>
    <causeKind>poleDown</causeKind>
    <communityDescriptor>Belltown</communityDescriptor>
    <customersRestored>177</customersRestored>
    <metersAffected>835</metersAffected>
    <originalCustomersServed>1012</originalCustomersServed>
    <originalMetersAffected>1012</originalMetersAffected>
    <outageKind>partiallyRestored</outageKind>
    <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
    <statusKind>arrived</statusKind>
    <utilityDisclaimer>none</utilityDisclaimer>
    <actualPeriod>
      <end>2019-12-17T09:30:47Z</end>

```

```

    <start>2019-12-17T09:30:47Z</start>
  </actualPeriod>
  <estimatedPeriod>
    <start>2019-12-17T09:30:47Z</start>
  </estimatedPeriod>
  <EstimatedRestorationTime>
    <confidenceKind>high</confidenceKind>
    <ert>2019-12-17T09:30:47Z</ert>
    <ertSource>control center</ertSource>
  </EstimatedRestorationTime>
  <Incident>
    <cause>wind</cause>
    <Location>
      <direction>W</direction>
      <geoInfoReference>park</geoInfoReference>
      <kind>weatherZone</kind>
      <type>geographical</type>
      <CoordinateSystem>
        <crsUrn>EPSG:4326</crsUrn>
      </CoordinateSystem>
      <PositionPoints>
        <sequenceNumber>0</sequenceNumber>
        <xPosition>15</xPosition>
        <yPosition>66</yPosition>
      </PositionPoints>
    </Location>
  </Incident>
  <OutageArea>
    <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
    <metersServed>1012</metersServed>
    <outageAreaKind>county</outageAreaKind>
  </OutageArea>
</Outage>
</PubOutages>

```

Use Case ODI-ADD-OPT-ERT1 (Optional EstimatedRestorationTime): A POST Request to add Outage Data With All Fields Present Except EstimatedRestorationTime

In this use case, *estimatedRestorationTime* is omitted from the initial outage creation. Most utilities may automatically assign an estimated restoration time to each outage. For example, a system may assign an estimated restoration time of 4 hours and then a PATCH or PUT request in REST or change message in the CIM SOAP standard may be sent to update the estimated restoration time as conditions change. In this use case, the *estimatedRestorationTime* attribute is omitted entirely.

Result Expectation: Outage message is processed successfully without *estimatedRestorationTime* attribute.

```

<?xml version="1.0" encoding="UTF-8"?>
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>

```

```

<mRID>18ea4e83-296a-4f33-a07c-6fbfa4ec777b</mRID>
<cause>tree</cause>
<causeKind>lineDown</causeKind>
<communityDescriptor>Bainbridge Island</communityDescriptor>
<customersRestored>17</customersRestored>
<metersAffected>35</metersAffected>
<originalCustomersServed>52</originalCustomersServed>
<originalMetersAffected>52</originalMetersAffected>
<outageKind>partiallyRestored</outageKind>
<reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
<statusKind>arrived</statusKind>
<utilityDisclaimer>none</utilityDisclaimer>
<actualPeriod>
  <end>2019-12-17T09:30:47Z</end>
  <start>2019-12-17T09:30:47Z</start>
</actualPeriod>
<estimatedPeriod>
  <end>2019-12-17T09:30:47Z</end>
  <start>2019-12-17T09:30:47Z</start>
</estimatedPeriod>
<Incident>
  <cause>wind</cause>
  <Location>
    <direction>S</direction>
    <geoInfoReference>campground</geoInfoReference>
    <kind>weatherZone</kind>
    <type>geographical</type>
    <CoordinateSystem>
      <crsUrn>EPSG:4326</crsUrn>
    </CoordinateSystem>
    <PositionPoints>
      <sequenceNumber>0</sequenceNumber>
      <xPosition>24</xPosition>
      <yPosition>11</yPosition>
    </PositionPoints>
  </Location>
</Incident>
<OutageArea>
  <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
  <metersServed>52</metersServed>
  <outageAreaKind>county</outageAreaKind>
</OutageArea>
</Outage>
</PubOutages>

```

Use Case ODI-ADD-OPT-ERT2 (EstimatedRestorationTime Missing Field): A POST Request to add Outage Data With Missing Field from EstimatedRestorationTime

In this use case, *estimatedRestorationTime* is provided but it is missing one of its mandatory attributes, *ertSource*. This element can be any string value representing the source of the estimated restoration time. For example, the source could be system provided or it could come from someone out on the field that provided an estimate of how long it would take to restore the outage. Because this estimated restoration time must come from somewhere, this field is

mandatory. A typical combination might set *ertSource* as “system” and *confidenceKind* as “high” for example.

Result Expection: Message should fail to post and be met with an error message due to missing mandatory attribute *ertSource* from the *estimatedRestorationTime* element.

```
<?xml version="1.0" encoding="UTF-8"?>
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID>93508e1c-c2ac-45c8-88b4-a9684762b701</mRID>
    <cause>tree</cause>
    <causeKind>lineDown</causeKind>
    <communityDescriptor>Bainbridge Island</communityDescriptor>
    <customersRestored>17</customersRestored>
    <metersAffected>35</metersAffected>
    <originalCustomersServed>52</originalCustomersServed>
    <originalMetersAffected>52</originalMetersAffected>
    <outageKind>partiallyRestored</outageKind>
    <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
    <statusKind>arrived</statusKind>
    <utilityDisclaimer>none</utilityDisclaimer>
    <actualPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </actualPeriod>
    <estimatedPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </estimatedPeriod>
    <EstimatedRestorationTime>
      <confidenceKind>high</confidenceKind>
      <ert>2019-12-17T09:30:47Z</ert>
    </EstimatedRestorationTime>
    <Incident>
      <cause>wind</cause>
      <Location>
        <direction>S</direction>
        <geoInfoReference>campground</geoInfoReference>
        <kind>weatherZone</kind>
        <type>geographical</type>
        <CoordinateSystem>
          <crsUrn>EPSG:4326</crsUrn>
        </CoordinateSystem>
        <PositionPoints>
          <sequenceNumber>0</sequenceNumber>
          <xPosition>24</xPosition>
          <yPosition>11</yPosition>
        </PositionPoints>
      </Location>
    </Incident>
    <OutageArea>
      <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
      <metersServed>52</metersServed>
    </OutageArea>
  </Outage>
</PubOutages>
```

```

        <outageAreaKind>county</outageAreaKind>
    </OutageArea>
</Outage>
</PubOutages>

```

Use Case ODI-ADD-MTO-PP1 (ManyToOne PositionPoints): A POST Request to add Outage Data With Multiple Position Points Provided

In this use case, an outage is reported with multiple *PositionPoints* elements to signify three broken poles in the same outage area. The receiving system should be able to process multiple position points for a single outage area.

Result Expectation: Outage message is successfully processed with multiple *PositionPoints* elements. Only showing one of the *PositionPoints* and creating three separate outages or only listing one of the *PositionPoints* for a single outage message is considered a failure.

```

<?xml version="1.0" encoding="UTF-8"?>
<!--Sample XML file generated by XMLSpy v2018 (x64) (http://www.altova.com)-->
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
    <Outage>
        <mRID>65c8eee7-1ccc-4229-a03e-18196516ae03</mRID>
        <cause>weather</cause>
        <causeKind>poleDown</causeKind>
        <communityDescriptor>downtown</communityDescriptor>
        <customersRestored>1700</customersRestored>
        <metersAffected>2112</metersAffected>
        <originalCustomersServed>1272</originalCustomersServed>
        <originalMetersAffected>2112</originalMetersAffected>
        <outageKind>partiallyRestored</outageKind>
        <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
        <statusKind>fieldComplete</statusKind>
        <utilityDisclaimer>none</utilityDisclaimer>
        <actualPeriod>
            <end>2019-12-17T09:30:47Z</end>
            <start>2019-12-17T09:30:47Z</start>
        </actualPeriod>
        <estimatedPeriod>
            <end>2019-12-17T09:30:47Z</end>
            <start>2019-12-17T09:30:47Z</start>
        </estimatedPeriod>
        <EstimatedRestorationTime>
            <confidenceKind>high</confidenceKind>
            <ert>2019-12-17T09:30:47Z</ert>
            <ertSource>lineman</ertSource>
        </EstimatedRestorationTime>
        <Incident>
            <cause>wind</cause>
            <Location>
                <direction>NW</direction>
                <geoInfoReference>ridge</geoInfoReference>
                <kind>weatherZone</kind>
                <type>geographical</type>
            </Location>
        </Incident>
    </Outage>

```

```

    <CoordinateSystem>
      <crsUrn>EPSG:4326</crsUrn>
    </CoordinateSystem>
    <PositionPoints>
      <sequenceNumber>0</sequenceNumber>
      <xPosition>17</xPosition>
      <yPosition>42</yPosition>
    </PositionPoints>
    <PositionPoints>
      <sequenceNumber>1</sequenceNumber>
      <xPosition>17</xPosition>
      <yPosition>41</yPosition>
    </PositionPoints>
    <PositionPoints>
      <sequenceNumber>2</sequenceNumber>
      <xPosition>17</xPosition>
      <yPosition>42</yPosition>
    </PositionPoints>
  </Location>
</Incident>
<OutageArea>
  <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
  <metersServed>2112</metersServed>
  <outageAreaKind>county</outageAreaKind>
</OutageArea>
</Outage>
</PubOutages>

```

Use Case ODI-ADD-MTO-PP2 (ManyToOne PositionPoints): A POST Request to add Outage Data With Multiple Position Points Provided With Missing Mandatory Field

This use case is mostly the same as ODI-ADD-MTO-PP1, except that one of the mandatory fields, *sequenceNumber*, is missing in one of the *PositionPoints*. Despite the rest of the message being well-formed, this causes the entire message to not validate against the schema. The *sequenceNumber* attribute is used to designate sequence of that *PositionPoint* in a series of *PositionPoints*.

Result Expectation: Message should fail with error code due to missing attribute *sequenceNumber* in one of the *PositionPoints* elements.

```

<?xml version="1.0" encoding="UTF-8"?>
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID>da393f1f-1920-4e4d-a74e-b115e3cea4b6</mRID>
    <cause>weather</cause>
    <causeKind>poleDown</causeKind>
    <communityDescriptor>downtown</communityDescriptor>
    <customersRestored>1700</customersRestored>
    <metersAffected>2112</metersAffected>
    <originalCustomersServed>1272</originalCustomersServed>
    <originalMetersAffected>2112</originalMetersAffected>
  </Outage>
</PubOutages>

```

```

<outageKind>partiallyRestored</outageKind>
<reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
<statusKind>fieldComplete</statusKind>
<utilityDisclaimer>none</utilityDisclaimer>
<actualPeriod>
  <end>2019-12-17T09:30:47Z</end>
  <start>2019-12-17T09:30:47Z</start>
</actualPeriod>
<estimatedPeriod>
  <end>2019-12-17T09:30:47Z</end>
  <start>2019-12-17T09:30:47Z</start>
</estimatedPeriod>
<EstimatedRestorationTime>
  <confidenceKind>high</confidenceKind>
  <ert>2019-12-17T09:30:47Z</ert>
  <ertSource>lineman</ertSource>
</EstimatedRestorationTime>
<Incident>
  <cause>wind</cause>
  <Location>
    <direction>NW</direction>
    <geoInfoReference>ridge</geoInfoReference>
    <kind>weatherZone</kind>
    <type>geographical</type>
    <CoordinateSystem>
      <crsUrn>EPSG:4326</crsUrn>
    </CoordinateSystem>
    <PositionPoints>
      <sequenceNumber>0</sequenceNumber>
      <xPosition>17</xPosition>
      <yPosition>42</yPosition>
    </PositionPoints>
    <PositionPoints>
      <sequenceNumber>1</sequenceNumber>
      <xPosition>17</xPosition>
      <yPosition>41</yPosition>
    </PositionPoints>
    <PositionPoints>
      <xPosition>18</xPosition>
      <yPosition>41</yPosition>
    </PositionPoints>
  </Location>
</Incident>
<OutageArea>
  <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
  <metersServed>2112</metersServed>
  <outageAreaKind>county</outageAreaKind>
</OutageArea>
</Outage>
</PubOutages>

```

Use Case ODI-ADD-MTO-OA1 (ManyToOne OutageAreas): A POST Request to add Outage Data With Multiple Outage Areas Provided

In this use case, multiple *OutageAreas* are present in a single outage message. Because this is a more general outage message, it likely won't be as detailed as the one in this example. All fields are required in *OutageArea* because of how broad this kind of message is likely to be.

Result Expectation: Outage message is processed successfully with multiple *OutageArea* elements.

```
<?xml version="1.0" encoding="UTF-8"?>
<!--Sample XML file generated by XMLSpy v2018 (x64) (http://www.altova.com)-->
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID>1bffe318-6acb-4f21-9753-a8e99247b258</mRID>
    <cause>weather</cause>
    <causeKind>lightingStrike</causeKind>
    <communityDescriptor>Ballard</communityDescriptor>
    <customersRestored>313</customersRestored>
    <metersAffected>477</metersAffected>
    <originalCustomersServed>790</originalCustomersServed>
    <originalMetersAffected>790</originalMetersAffected>
    <outageKind>partiallyRestored</outageKind>
    <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
    <statusKind>fieldComplete</statusKind>
    <utilityDisclaimer>none</utilityDisclaimer>
    <actualPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </actualPeriod>
    <estimatedPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </estimatedPeriod>
    <EstimatedRestorationTime>
      <confidenceKind>high</confidenceKind>
      <ert>2019-12-17T09:30:47Z</ert>
      <ertSource>lineman</ertSource>
    </EstimatedRestorationTime>
    <Incident>
      <cause>wind</cause>
      <Location>
        <direction>S</direction>
        <geoInfoReference>Ballard Locks</geoInfoReference>
        <kind>weatherZone</kind>
        <type>geographical</type>
        <CoordinateSystem>
          <crsUrn>EPSG:4326</crsUrn>
        </CoordinateSystem>
        <PositionPoints>
          <sequenceNumber>0</sequenceNumber>
          <xPosition>17</xPosition>
```

```

        <yPosition>31</yPosition>
      </PositionPoints>
    </Location>
  </Incident>
  <OutageArea>
    <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
    <metersServed>120</metersServed>
    <outageAreaKind>borough</outageAreaKind>
  </OutageArea>
  <OutageArea>
    <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
    <metersServed>670</metersServed>
    <outageAreaKind>zipcode</outageAreaKind>
  </OutageArea>
</Outage>
</PubOutages>

```

Use Case ODI-ADD-MTO-OA2 (ManyToOne OutageAreas): A POST Request to add Outage Data With Multiple Outage Areas Provided With Missing Mandatory Field

This use case is mostly the same as ODI-ADD-MTO-OA1, except that one of the mandatory fields, *outageAreaKind*, is missing in one of the *OutageAreas*. Despite the rest of the message being well-formed, this causes the entire message to not validate against the schema.

Result Expectation: Message should fail with error code due to missing mandatory attribute *outageAreaKind* in element *OutageArea*.

```

<?xml version="1.0" encoding="UTF-8"?>
<!--Sample XML file generated by XMLSpy v2018 (x64) (http://www.altova.com)-->
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID>e8fd0dcb-e3fc-4320-a2f5-5761fa1f631d</mRID>
    <cause>weather</cause>
    <causeKind>lightingStrike</causeKind>
    <communityDescriptor>Ballard</communityDescriptor>
    <customersRestored>313</customersRestored>
    <metersAffected>477</metersAffected>
    <originalCustomersServed>790</originalCustomersServed>
    <originalMetersAffected>790</originalMetersAffected>
    <outageKind>partiallyRestored</outageKind>
    <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
    <statusKind>fieldComplete</statusKind>
    <utilityDisclaimer>none</utilityDisclaimer>
    <actualPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </actualPeriod>
    <estimatedPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </estimatedPeriod>
  </Outage>

```

```

    <EstimatedRestorationTime>
      <confidenceKind>high</confidenceKind>
      <ert>2019-12-17T09:30:47Z</ert>
      <ertSource>lineman</ertSource>
    </EstimatedRestorationTime>
  </Incident>
  <Location>
    <direction>S</direction>
    <geoInfoReference>Ballard Locks</geoInfoReference>
    <kind>weatherZone</kind>
    <type>geographical</type>
    <CoordinateSystem>
      <crsUrn>EPSG:4326</crsUrn>
    </CoordinateSystem>
    <PositionPoints>
      <sequenceNumber>0</sequenceNumber>
      <xPosition>17</xPosition>
      <yPosition>31</yPosition>
    </PositionPoints>
  </Location>
</Incident>
<OutageArea>
  <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
  <metersServed>120</metersServed>
  <outageAreaKind>borough</outageAreaKind>
</OutageArea>
<OutageArea>
  <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
  <metersServed>670</metersServed>
</OutageArea>
</Outage>
</PubOutages>

```

Use Case ODI-ADD-MTO-INC1 (ManyToOne Incidents): A POST Request to add Outage Data With Multiple Incidents Provided

In this use case, an outage message is sent with multiple *Incident* elements to describe where outages have occurred in different locations. The receiving system should be able to process multiple *Incidents* for a single outage.

Result Expectation: Outage message is successfully processed with multiple *Incident* elements. Only showing one of the *Incidents* and creating three separate outages or only listing one of the *Incidents* for a single outage message is considered a failure.

```

<?xml version="1.0" encoding="UTF-8"?>
<!--Sample XML file generated by XMLSpy v2018 (x64) (http://www.altova.com)-->
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID>77cef885-ec29-41f2-9c98-ed06fb2da84</mRID>
    <cause>weather</cause>
    <causeKind>lightningStrike</causeKind>

```

```

<communityDescriptor>Ballard</communityDescriptor>
<customersRestored>313</customersRestored>
<metersAffected>477</metersAffected>
<originalCustomersServed>790</originalCustomersServed>
<originalMetersAffected>790</originalMetersAffected>
<outageKind>partiallyRestored</outageKind>
<reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
<statusKind>fieldComplete</statusKind>
<utilityDisclaimer>none</utilityDisclaimer>
<actualPeriod>
  <end>2019-12-17T09:30:47Z</end>
  <start>2019-12-17T09:30:47Z</start>
</actualPeriod>
<estimatedPeriod>
  <end>2019-12-17T09:30:47Z</end>
  <start>2019-12-17T09:30:47Z</start>
</estimatedPeriod>
<EstimatedRestorationTime>
  <confidenceKind>high</confidenceKind>
  <ert>2019-12-17T09:30:47Z</ert>
  <ertSource>lineman</ertSource>
</EstimatedRestorationTime>
<Incident>
  <cause>wind</cause>
  <Location>
    <direction>S</direction>
    <geoInfoReference>Ballard Locks</geoInfoReference>
    <kind>weatherZone</kind>
    <type>geographical</type>
    <CoordinateSystem>
      <crsUrn>EPSG:4326</crsUrn>
    </CoordinateSystem>
    <PositionPoints>
      <sequenceNumber>0</sequenceNumber>
      <xPosition>17</xPosition>
      <yPosition>31</yPosition>
    </PositionPoints>
  </Location>
</Incident>
<Incident>
  <cause>wind</cause>
  <Location>
    <direction>NW</direction>
    <geoInfoReference>Golden Gardens Park</geoInfoReference>
    <kind>weatherZone</kind>
    <type>geographical</type>
    <CoordinateSystem>
      <crsUrn>EPSG:4326</crsUrn>
    </CoordinateSystem>
    <PositionPoints>
      <sequenceNumber>0</sequenceNumber>
      <xPosition>17</xPosition>
      <yPosition>31</yPosition>
    </PositionPoints>
  </Location>

```

```

</Incident>
<OutageArea>
  <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
  <metersServed>120</metersServed>
  <outageAreaKind>borough</outageAreaKind>
</OutageArea>
</Outage>
</PubOutages>

```

Use Case ODI-ADD-MTO-INC2 (ManyToOne Incidents): A POST Request to add Outage Data With Multiple Incidents Provided With Missing Field

This use case is mostly the same as ODI-ADD-MTO-INC1, except that one of the mandatory fields, cause, is missing in one of the Incidents. Despite the rest of the message being well-formed, this causes the entire message to not validate against the schema.

Result Expectation: Message should fail with error code due to missing mandatory attribute *cause* in element *Incident*.

```

<?xml version="1.0" encoding="UTF-8"?>
<!--Sample XML file generated by XMLSpy v2018 (x64) (http://www.altova.com)-->
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID> 842d9936-47c8-4258-b1c3-4309056c05c1</mRID>
    <cause>weather</cause>
    <causeKind>lightingStrike</causeKind>
    <communityDescriptor>Ballard</communityDescriptor>
    <customersRestored>313</customersRestored>
    <metersAffected>477</metersAffected>
    <originalCustomersServed>790</originalCustomersServed>
    <originalMetersAffected>790</originalMetersAffected>
    <outageKind>partiallyRestored</outageKind>
    <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
    <statusKind>fieldComplete</statusKind>
    <utilityDisclaimer>none</utilityDisclaimer>
    <actualPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </actualPeriod>
    <estimatedPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </estimatedPeriod>
    <EstimatedRestorationTime>
      <confidenceKind>high</confidenceKind>
      <ert>2019-12-17T09:30:47Z</ert>
      <ertSource>lineman</ertSource>
    </EstimatedRestorationTime>
    <Incident>
      <cause>wind</cause>
      <Location>
        <direction>S</direction>

```

```

    <geoInfoReference>Ballard Locks</geoInfoReference>
    <kind>weatherZone</kind>
    <type>geographical</type>
    <CoordinateSystem>
      <crsUrn>EPSG:4326</crsUrn>
    </CoordinateSystem>
    <PositionPoints>
      <sequenceNumber>0</sequenceNumber>
      <xPosition>17</xPosition>
      <yPosition>31</yPosition>
    </PositionPoints>
  </Location>
</Incident>
<Incident>
  <Location>
    <direction>NW</direction>
    <geoInfoReference>Golden Gardens Park</geoInfoReference>
    <kind>weatherZone</kind>
    <type>geographical</type>
    <CoordinateSystem>
      <crsUrn>EPSG:4326</crsUrn>
    </CoordinateSystem>
    <PositionPoints>
      <sequenceNumber>0</sequenceNumber>
      <xPosition>17</xPosition>
      <yPosition>31</yPosition>
    </PositionPoints>
  </Location>
</Incident>
<OutageArea>
  <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
  <metersServed>120</metersServed>
  <outageAreaKind>borough</outageAreaKind>
</OutageArea>
</Outage>
</PubOutages>

```


4

PUT REQUESTS

Use Case ODI-UPD-ALL (Update All Fields): A PUT Request Changing Data From ODI-ADD-ALL

PUT requests are similar to the “change” verb in the CIM SOAP standard; it allows you to change an object but all fields must be provided. For example, if *cause* needs to be changed in an Outage message, the full Outage message must be sent with all data fields filled out as they were in the original POST request. The first test case for PUT, ODI-UPD-ALL, takes the message sent in ODI-ADD-ALL and changes the cause from “weather” to “automobile accident.”

```
<?xml version="1.0" encoding="UTF-8"?>
<!--Sample XML file generated by XMLSpy v2018 (x64) (http://www.altova.com)-->
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID>3fbbc649-3e42-401b-bbbc-1ab1a1bcbbbe</mRID>
    <cause>automobile accident</cause>
    <causeKind>treeDown</causeKind>
    <communityDescriptor>Karns</communityDescriptor>
    <customersRestored>3</customersRestored>
    <metersAffected>12</metersAffected>
    <originalCustomersServed>12</originalCustomersServed>
    <originalMetersAffected>12</originalMetersAffected>
    <outageKind>partiallyRestored</outageKind>
    <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
    <statusKind>fieldComplete</statusKind>
    <utilityDisclaimer>none</utilityDisclaimer>
    <actualPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </actualPeriod>
    <estimatedPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </estimatedPeriod>
    <EstimatedRestorationTime>
      <confidenceKind>high</confidenceKind>
      <ert>2019-12-17T09:30:47Z</ert>
      <ertSource>lineman</ertSource>
    </EstimatedRestorationTime>
    <Incident>
      <cause>wind</cause>
      <Location>
        <direction>NW</direction>
        <geoInfoReference>ridge</geoInfoReference>
        <kind>weatherZone</kind>
        <type>geographical</type>
```

```

    <CoordinateSystem>
      <crsUrn>EPSG:4326</crsUrn>
    </CoordinateSystem>
    <PositionPoints>
      <sequenceNumber>0</sequenceNumber>
      <xPosition>17</xPosition>
      <yPosition>31</yPosition>
    </PositionPoints>
  </Location>
</Incident>
<OutageArea>
  <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
  <metersServed>12</metersServed>
  <outageAreaKind>county</outageAreaKind>
</OutageArea>
</Outage>
</PubOutages>

```

Use Case ODI-UPD-OPT-AP1 (Update Optional ActualPeriod): A PUT Request to Change ODI-ADD-OPT-AP1 by Adding Actualperiod Data

This request takes the ODI-ADD-OPT-AP1 message and adds in the missing data for Actualperiod before resending. Therefore, it uses the same mRID as ODI-ADD-OPT-AP1. All data should otherwise remain the same as in ODI-ADD-OPT-AP1.

Result Expectation: A successfully changed outage message for outage with mRID fc9758b7-d121-4233-b9f0-a63f288143fa. The *actualPeriod* element should now be present.

```

<?xml version="1.0" encoding="UTF-8"?>
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID>fc9758b7-d121-4233-b9f0-a6ef288143fa</mRID>
    <cause>auto accident</cause>
    <causeKind>treeDown</causeKind>
    <communityDescriptor>Bellevue</communityDescriptor>
    <customersRestored>5</customersRestored>
    <metersAffected>107</metersAffected>
    <originalCustomersServed>112</originalCustomersServed>
    <originalMetersAffected>112</originalMetersAffected>
    <outageKind>partiallyRestored</outageKind>
    <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
    <statusKind>fieldComplete</statusKind>
    <utilityDisclaimer>none</utilityDisclaimer>
    <actualPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T10:30:47Z</start>
    </actualPeriod>
    <estimatedPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </estimatedPeriod>
    <EstimatedRestorationTime>

```

```

    <confidenceKind>high</confidenceKind>
    <ert>2019-12-17T09:30:47Z</ert>
    <ertSource>control center</ertSource>
  </EstimatedRestorationTime>
  <Incident>
    <cause>wind</cause>
    <Location>
      <direction>NW</direction>
      <geoInfoReference>lake</geoInfoReference>
      <kind>weatherZone</kind>
      <type>geographical</type>
      <CoordinateSystem>
        <crsUrn>EPSG:4326</crsUrn>
      </CoordinateSystem>
      <PositionPoints>
        <sequenceNumber>0</sequenceNumber>
        <xPosition>33</xPosition>
        <yPosition>15</yPosition>
      </PositionPoints>
    </Location>
  </Incident>
  <OutageArea>
    <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
    <metersServed>112</metersServed>
    <outageAreaKind>county</outageAreaKind>
  </OutageArea>
</Outage>
</PubOutages>

```

Use Case ODI-UPD-OPT-EP1 (Update Optional EstimatedPeriod): A POST Request to Change ODI-ADD-OPT-EP1 by Adding Estimatedperiod Data

This request takes the ODI-ADD-OPT-EP1 message and adds in the missing data for estimatedPeriod before resending. It uses the same mRID as ODI-ADD-OPT-EP1. All data should otherwise remain the same as in ODI-ADD-OPT-EP1.

Result Expectation: A successfully changed outage message for outage with mRID fd532f2d-37d8-423a-a08e-8f9e4c4e6283. The *estimatedPeriod* element should now be present.

```

<?xml version="1.0" encoding="UTF-8"?>
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID>fd532f2d-37d8-423a-a08e-8f9e4c4e6283</mRID>
    <cause>animal</cause>
    <causeKind>poleDown</causeKind>
    <communityDescriptor>Belltown</communityDescriptor>
    <customersRestored>177</customersRestored>
    <metersAffected>835</metersAffected>
    <originalCustomersServed>1012</originalCustomersServed>
    <originalMetersAffected>1012</originalMetersAffected>
    <outageKind>partiallyRestored</outageKind>
    <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>

```

```

<statusKind>arrived</statusKind>
<utilityDisclaimer>none</utilityDisclaimer>
<actualPeriod>
  <end>2019-12-17T09:30:47Z</end>
  <start>2019-12-17T09:30:47Z</start>
</actualPeriod>
<estimatedPeriod>
  <end>2019-12-17T09:30:47Z</end>
  <start>2019-12-17T09:30:47Z</start>
</estimatedPeriod>
<EstimatedRestorationTime>
  <confidenceKind>high</confidenceKind>
  <ert>2019-12-17T09:30:47Z</ert>
  <ertSource>control center</ertSource>
</EstimatedRestorationTime>
<Incident>
  <cause>wind</cause>
  <Location>
    <direction>W</direction>
    <geoInfoReference>park</geoInfoReference>
    <kind>weatherZone</kind>
    <type>geographical</type>
    <CoordinateSystem>
      <crsUrn>EPSG:4326</crsUrn>
    </CoordinateSystem>
    <PositionPoints>
      <sequenceNumber>0</sequenceNumber>
      <xPosition>15</xPosition>
      <yPosition>66</yPosition>
    </PositionPoints>
  </Location>
</Incident>
<OutageArea>
  <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
  <metersServed>1012</metersServed>
  <outageAreaKind>county</outageAreaKind>
</OutageArea>
</Outage>
</PubOutages>

```

Use Case ODI-UPD-OPT-ERT1 (Update Optional EstimatedRestorationTime): A PUT Request to Change ODI-ADD-OPT-ERT1 by Adding EstimatedRestorationTime

This request takes the ODI-ADD-OPT-ERT1 message and adds in the missing data for estimatedRestorationTime before resending. It uses the same mRID as ODI-ADD-OPT-ERT1. All data should otherwise remain the same as in ODI-ADD-OPT-ERT1.

Result Expectation: A successfully changed outage message for outage with mRID 18ea4e83-296a-4f33-a07c-6fbfa4ec777b. The *EstimatedRestorationTime* element should now be present.

```

<?xml version="1.0" encoding="UTF-8"?>
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID>18ea4e83-296a-4f33-a07c-6fbfa4ec777b</mRID>
    <cause>tree</cause>
    <causeKind>lineDown</causeKind>
    <communityDescriptor>Bainbridge Island</communityDescriptor>
    <customersRestored>17</customersRestored>
    <metersAffected>35</metersAffected>
    <originalCustomersServed>52</originalCustomersServed>
    <originalMetersAffected>52</originalMetersAffected>
    <outageKind>partiallyRestored</outageKind>
    <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
    <statusKind>arrived</statusKind>
    <utilityDisclaimer>none</utilityDisclaimer>
    <actualPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </actualPeriod>
    <estimatedPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </estimatedPeriod>
    <EstimatedRestorationTime>
      <confidenceKind>high</confidenceKind>
      <ert>2019-12-17T09:30:47Z</ert>
      <ertSource>control center</ertSource>
    </EstimatedRestorationTime>
    <Incident>
      <cause>wind</cause>
      <Location>
        <direction>S</direction>
        <geoInfoReference>campground</geoInfoReference>
        <kind>weatherZone</kind>
        <type>geographical</type>
        <CoordinateSystem>
          <crsUrn>EPSG:4326</crsUrn>
        </CoordinateSystem>
        <PositionPoints>
          <sequenceNumber>0</sequenceNumber>
          <xPosition>24</xPosition>
          <yPosition>11</yPosition>
        </PositionPoints>
      </Location>
    </Incident>
    <OutageArea>
      <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
      <metersServed>52</metersServed>
      <outageAreaKind>county</outageAreaKind>
    </OutageArea>
  </Outage>
</PubOutages>

```

Use Case ODI-UPD-MTO-PP1 (Update Multiple PositionPoints): A PUT Request to Change ODI-ADD-MTO-PP1 by Removing Extra PositionPoints

This request takes the ODI-ADD-MTO-PP1 message and removes the additional PositionPoints aside from the first one. It uses the same mRID as ODI-ADD-MTO-PP1. All data should otherwise remain the same as in ODI-ADD-MTO-PP1.

Result Expectation: A successfully changed outage message for outage with mRID 65c8eee7-1ccc-4229-a03e-18196516ae03. The *PositionPoints* element should only show one instead of many *PositionPoints*.

```
<?xml version="1.0" encoding="UTF-8"?>
<!--Sample XML file generated by XMLSpy v2018 (x64) (http://www.altova.com)-->
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID>65c8eee7-1ccc-4229-a03e-18196516ae03</mRID>
    <cause>weather</cause>
    <causeKind>poleDown</causeKind>
    <communityDescriptor>downtown</communityDescriptor>
    <customersRestored>1700</customersRestored>
    <metersAffected>2112</metersAffected>
    <originalCustomersServed>1272</originalCustomersServed>
    <originalMetersAffected>2112</originalMetersAffected>
    <outageKind>partiallyRestored</outageKind>
    <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
    <statusKind>fieldComplete</statusKind>
    <utilityDisclaimer>none</utilityDisclaimer>
    <actualPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </actualPeriod>
    <estimatedPeriod>
      <end>2019-12-17T09:30:47Z</end>
      <start>2019-12-17T09:30:47Z</start>
    </estimatedPeriod>
    <EstimatedRestorationTime>
      <confidenceKind>high</confidenceKind>
      <ert>2019-12-17T09:30:47Z</ert>
      <ertSource>lineman</ertSource>
    </EstimatedRestorationTime>
    <Incident>
      <cause>wind</cause>
      <Location>
        <direction>NW</direction>
        <geoInfoReference>ridge</geoInfoReference>
        <kind>weatherZone</kind>
        <type>geographical</type>
        <CoordinateSystem>
          <crsUrn>EPSG:4326</crsUrn>
        </CoordinateSystem>
        <PositionPoints>
          <sequenceNumber>0</sequenceNumber>
```

```

        <xPosition>17</xPosition>
        <yPosition>31</yPosition>
    </PositionPoints>
</Location>
</Incident>
<OutageArea>
    <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
    <metersServed>2112</metersServed>
    <outageAreaKind>county</outageAreaKind>
</OutageArea>
</Outage>
</PubOutages>

```

Use Case ODI-UPD-MTO-OA1 (Update Multiple OutageAreas): A PUT Request to Change ODI-ADD-MTO-OA1 by Removing Extra OutageAreas

Like ODI-UPD-MTO-PP1, this use case removes the additional outage areas listed by message ODI-ADD-MTO-OA1.

Result Expectation: A successfully changed outage message for outage with mRID 1bffe318-6acb-4f21-9753-a8e99247b258. The *OutageArea* element should only show one instead of many *OutageAreas*.

```

<?xml version="1.0" encoding="UTF-8"?>
<!--Sample XML file generated by XMLSpy v2018 (x64) (http://www.altova.com)-->
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
    <Outage>
        <mRID>1bffe318-6acb-4f21-9753-a8e99247b258</mRID>
        <cause>weather</cause>
        <causeKind>lightingStrike</causeKind>
        <communityDescriptor>Ballard</communityDescriptor>
        <customersRestored>313</customersRestored>
        <metersAffected>477</metersAffected>
        <originalCustomersServed>790</originalCustomersServed>
        <originalMetersAffected>790</originalMetersAffected>
        <outageKind>partiallyRestored</outageKind>
        <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
        <statusKind>fieldComplete</statusKind>
        <utilityDisclaimer>none</utilityDisclaimer>
        <actualPeriod>
            <end>2019-12-17T09:30:47Z</end>
            <start>2019-12-17T09:30:47Z</start>
        </actualPeriod>
        <estimatedPeriod>
            <end>2019-12-17T09:30:47Z</end>
            <start>2019-12-17T09:30:47Z</start>
        </estimatedPeriod>
        <EstimatedRestorationTime>
            <confidenceKind>high</confidenceKind>
            <ert>2019-12-17T09:30:47Z</ert>
            <ertSource>lineman</ertSource>
        </EstimatedRestorationTime>
    </Outage>

```

```

<Incident>
  <cause>wind</cause>
  <Location>
    <direction>S</direction>
    <geoInfoReference>Ballard Locks</geoInfoReference>
    <kind>weatherZone</kind>
    <type>geographical</type>
    <CoordinateSystem>
      <crsUrn>EPSG:4326</crsUrn>
    </CoordinateSystem>
    <PositionPoints>
      <sequenceNumber>0</sequenceNumber>
      <xPosition>17</xPosition>
      <yPosition>31</yPosition>
    </PositionPoints>
  </Location>
</Incident>
<OutageArea>
  <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
  <metersServed>120</metersServed>
  <outageAreaKind>borough</outageAreaKind>
</OutageArea>
</Outage>
</PubOutages>

```

Use Case ODI-UPD-MTO-INC1 (Update ManyToOne Incidents): A PUT Request to Change ODI-ADD-MTO-INC1 by Removing Extra Incidents

This use case removes additional Incident fields from the ODI-ADD-MTO-INC1 message. This message should be mostly identical to ODI-ADD-MTO-INC1 except for the additional Incident fields.

Result Expectation: A successfully changed outage message for outage with mRID 77cef885-ec29-41f2-9c98-ed06fb2da84. The *Incident* element should only show one instead of many *Incidents*.

```

<?xml version="1.0" encoding="UTF-8"?>
<!--Sample XML file generated by XMLSpy v2018 (x64) (http://www.altova.com)-->
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://iec.ch/TC57/2014/PubOutages# PubOutages.xsd">
  <Outage>
    <mRID>77cef885-ec29-41f2-9c98-ed06fb2da84</mRID>
    <cause>weather</cause>
    <causeKind>lightingStrike</causeKind>
    <communityDescriptor>Ballard</communityDescriptor>
    <customersRestored>313</customersRestored>
    <metersAffected>477</metersAffected>
    <originalCustomersServed>790</originalCustomersServed>
    <originalMetersAffected>790</originalMetersAffected>
    <outageKind>partiallyRestored</outageKind>
    <reportedStartTime>2019-12-17T09:30:47Z</reportedStartTime>
    <statusKind>fieldComplete</statusKind>
    <utilityDisclaimer>none</utilityDisclaimer>
  </Outage>
</PubOutages>

```

```

<actualPeriod>
  <end>2019-12-17T09:30:47Z</end>
  <start>2019-12-17T09:30:47Z</start>
</actualPeriod>
<estimatedPeriod>
  <end>2019-12-17T09:30:47Z</end>
  <start>2019-12-17T09:30:47Z</start>
</estimatedPeriod>
<EstimatedRestorationTime>
  <confidenceKind>high</confidenceKind>
  <ert>2019-12-17T09:30:47Z</ert>
  <ertSource>lineman</ertSource>
</EstimatedRestorationTime>
<Incident>
  <cause>wind</cause>
  <Location>
    <direction>S</direction>
    <geoInfoReference>Ballard Locks</geoInfoReference>
    <kind>weatherZone</kind>
    <type>geographical</type>
    <CoordinateSystem>
      <crsUrn>EPSG:4326</crsUrn>
    </CoordinateSystem>
    <PositionPoints>
      <sequenceNumber>0</sequenceNumber>
      <xPosition>17</xPosition>
      <yPosition>31</yPosition>
    </PositionPoints>
  </Location>
</Incident>
<OutageArea>
  <earliestReportedTime>2019-12-17T09:30:47Z</earliestReportedTime>
  <metersServed>120</metersServed>
  <outageAreaKind>borough</outageAreaKind>
</OutageArea>
</Outage>
</PubOutages>

```


5

PATCH REQUESTS

Use Case ODI-PATCH-1FIELD (Patch One Field): A PATCH Request to Change One Mislabeled Field from ODI-ADD-ALL

In this request, we are modifying the *cause* field via PATCH request. Unlike a PUT request, only the field being changed needs to reply, being sent to a URL corresponding to the object being modified. A sample URL to send ODI-PATCH-1FIELD would be <http://myservice.com/odi/3fbbc649-3e42-401b-bbbc-1ab1a1bcbbbe> and the message would be a short XML as shown below.

Result Expectation: Outage with mRID 3fbbc649-3e42-401b-bbbc-1ab1a1bcbbbe should be the same as it was prior to this call with the exception of the *cause* field being changed.

```
<?xml version="1.0" encoding="UTF-8"?>
<PubOutages xmlns="http://iec.ch/TC57/2014/PubOutages#">
  <Outage>
    <cause>high winds</cause>
  </Outage>
</PubOutages>
```


6

GET REQUESTS


Use Case ODI-GET-ALL (Get All Outages): A GET Request to Retrieve All Outage Data

This use case is a simple GET request to retrieve all Outage information. Send a GET message to your web service's URL, for example, <http://mywebservice.com/odi>.

Result Expectation: All current outages should be retrieved when this message is called.

Use Case ODI-GET-ONE (Get Specified Outage): A GET Request to Retrieve Specific Outage Data


This use case makes use of the mRID to retrieve data for a specific Outage. In SOAP UI, multiple parameters can be set for each message. To retrieve data based on mRID if it's not being used as the database primary key, an example parameter would be set like pictured below:

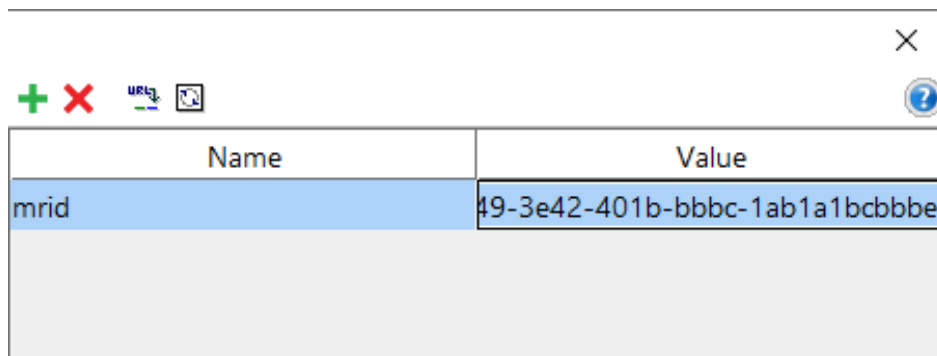

A screenshot of a SoapUI parameter table. The table has two columns: 'Name' and 'Value'. The first row has 'mrid' in the 'Name' column and '49-3e42-401b-bbbc-1ab1a1bcbbbe' in the 'Value' column. The table is part of a larger window with a close button (X) and a help button (?) in the top right corner. There are also icons for adding (+), deleting (X), and copying (URL icon) parameters in the top left corner.

Name	Value
mrid	49-3e42-401b-bbbc-1ab1a1bcbbbe

Figure 6-1
Setting optional parameters for a RESTful URI in SoapUI

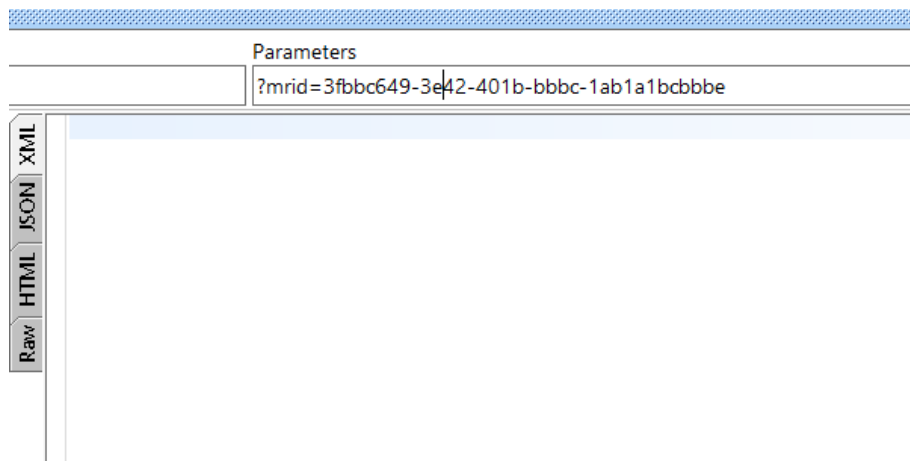

A screenshot of the SoapUI REST client view. The 'Parameters' tab is selected, showing a list of parameters. The first parameter is 'mrid=3fbbc649-3e42-401b-bbbc-1ab1a1bcbbbe'. The view also includes tabs for 'Raw', 'HTML', 'JSON', and 'XML' on the left side.

Parameters
?mrid=3fbbc649-3e42-401b-bbbc-1ab1a1bcbbbe

Figure 6-2
View of all added parameters in a RESTful URI in SoapUI

Note that many REST APIs use an integer field instead of UUID for indexing the database. In that case, either option could be used for retrieval of data, but it is considered good practice to keep the actual primary key of each object hidden from users and have them use a mRID to obtain the object instead.

For the purposes of this test script, the assumption is that the mRID will be used to retrieve an Outage object. For this case then, a message would be sent to <http://mywebservice.com/odi/3fbbc649-3e42-401b-bbbc-1ab1a1bcbbbe>.

Result Expectation: Only the outage data for outage with mRID 3fbbc649-3e42-401b-bbbc-1ab1a1bcbbbe should be retrieved.

Use Case ODI-DEL-ONE (Delete Outage): A DELETE Request to Remove Outage Data Created Earlier

Should an Outage need to be cleared for any reason, the DELETE verb must be used to delete the object. This use case deletes the outage that was just updated in PATCH7 (created originally in ODI-ADD-ALL). There is no sample XML for this. Simply send a DELETE message to <http://mywebservice.com/odi/3fbbc649-3e42-401b-bbbc-1ab1a1bcbbbe> and verify via GET that the Outage has been deleted.

Result Expectation: Only the outage with mRID 3fbbc649-3e42-401b-bbbc-1ab1a1bcbbbe should be deleted.

The Electric Power Research Institute, Inc. (EPRI, www.epri.com) conducts research and development relating to the generation, delivery and use of electricity for the benefit of the public. An independent, nonprofit organization, EPRI brings together its scientists and engineers as well as experts from academia and industry to help address challenges in electricity, including reliability, efficiency, affordability, health, safety and the environment. EPRI also provides technology, policy and economic analyses to drive long-range research and development planning, and supports research in emerging technologies. EPRI members represent 90% of the electricity generated and delivered in the United States with international participation extending to nearly 40 countries. EPRI's principal offices and laboratories are located in Palo Alto, Calif.; Charlotte, N.C.; Knoxville, Tenn.; Dallas, Texas; Lenox, Mass.; and Washington, D.C.

Together...Shaping the Future of Electricity